




See also:



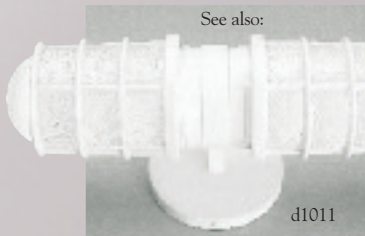

	A	B	C
d1010:	6 1/4"	9 1/4"	4 1/4"
d1016:	8"	11 3/4"	5 1/2"

Item #	Lamping	Voltage	Fixture Finish	Options	Sp. Orders
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Work space for submittals

How to specify

Example from illustration at left

d1010	-1N100	-120	-WH	-RG-PS	
-------	--------	------	-----	--------	--

Item Number

d1010
d1016

SOFT INDUSTRIAL wall fixture
SOFT INDUSTRIAL wall fixture - Large

Construction

Cast aluminum grill and fittings. Clear glass enclosure. 5" diam. x 1/2" deep canopy. (Fluorescent versions enclose ballast in 5" diam. x 2" deep canopy.) For standard wall junction box mounting. UL listed, cUL (ETL/ETLc for LED) certified for dry locations.

Lamping / Wattage

Fixtures supplied less lamps.
Lamps may be ordered from d'ac.

1N100*
1N200*

Incandescent, one 100 W, medium base, A type
Incandescent, one 200 W, medium base, A type

LED6 (d1010)*
LED8 (d1016)

LED, 6W LED with electronic driver. 552 Lumen output.
LED, 8W LED with electronic driver. 736 Lumen output.

*Available on d1016 only

Voltage

120 120V 277 277V

Fixture Finishes

See Page d9000 & d9000 Supplement for color renderings

AL Brushed Aluminum
Baked Enamel Finishes:

WH White Gloss	G1 Light Grey	G2 Medium Grey
MG Metallic Grey	AN Metallic Anthracite	BG Black Gloss
MB Matte Black	BC Black Crinkle	CU Metallic Copper
BZ Metallic Bronze	T1 Light Tan	T2 Medium Tan
GM Metallic Green	SF Seafoam	BL Metallic Blue
RD Metallic Red	RB Bright Red	MP Magenta Pink
YL Bright Yellow	SCF Special Finish--must supply paint chip	

Options

RG Ribbed Glass enclosure **PS** Perforated metal Sleeve
WET Wet location UL/cUL (ETL/ETLc for LED) listed
SCF* Special/Custom Finish - customer must supply paint chip
8=A Dimming Driver (0-10V, Triac, or ELV, as specified)

Special Orders

For modifications to dimensions, electrical requirements and other special orders, please contact your d'ac representative.