



MICHIGAN PNEUMATIC TOOL

Industrial Air Tools

Heavy-Duty Industrial

IMPACT WRENCHES

Serving All Industries

- Petro Chemical
- Construction
- Assembly
- Foundry
- Rental



1-800-521-8104 • www.MichiganPneumatic.com

Heavy-Duty Impact Wrenches

Industrial Pistol Grip Impacts

Features a twin hammer** clutch for more power per pound, a pressure fed clutch lubrication system, two piece motor housing for easy maintenance, a built-in muffler for low noise and direct drive for fast run down.



Model 1700

Model 2920

Model 6060**

Model 2925

Model No.	Square Drive	Free Speed	Torque Range	Rec'd Hose size	Length	Weight	Air Inlet Thread	Avg. Air Consumption
1700	1/2" Square Drive	6500 rpm	37-370 ft.-lbs	1/4"	7"	5.3 lbs	1/4" npt	23.8 cfm
2920	3/4" Square Drive*	5500 rpm	800-1100 ft.-lbs	1/2"	12-1/2"	12 lbs	3/8" npt	38 cfm
6060	3/4" Square Drive*	3000 rpm	560-1100 ft.-lbs	1/2"	12-1/2"	12 lbs	3/8" npt	38 cfm
2925	3/4" Square Drive*	5200 rpm	800-1450 ft.-lbs	1/2"	9"	12.5 lbs	3/8" npt	60 cfm

* Also available in 1" sq. dr.

** Features powerful two-jaw clutch and steel clutch housing

Model No.	Shank Size	Handle Type	Torque Range	Length	Weight	Air Inlet	Avg. Air
2934B2	1" Sq. Through-Hole	Inside Trigger	1100-1600 ft.-lbs	11-1/4"	19 lbs	1/2" npt	47 cfm
2940B2	1" Sq. Through-Hole	Inside Trigger	1600-2000 ft.-lbs	12-13/32"	22 lbs	1/2" npt	58 cfm
2950B7	1-1/2" Sq. Through-Hole	Inside Trigger	2500-3000 ft.-lbs	14-1/2"	33 lbs	1/2" npt	70 cfm

Heavy-Duty Straight Impacts

Features a twin hammer clutch for more power per pound, a pressure fed clutch lubrication system, three piece motor housing for easy maintenance, a built-in muffler for low noise and direct drive for fast run down.



Model 2934B2

OPTIONS



Also available with outside trigger and #5 Spline

OPTIONS

Super-Duty Impacts

Features a high energy per blow two jaw clutch, rugged steel clutch housing machined from bar stock, bronze alloy end plates for long motor life, a three piece housing for ease of maintenance, high power-to-weight ratio.




Model 611



Model 6120

Model No.	Shank Size	Handle Type	Torque Range	Length	Weight	Air Inlet Thread	Avg. Air Consumption
611	1" Sq. Through-Hole	Inside Trigger	1800-2800 ft.-lbs	12-1/2"	22.50 lbs	1/2" npt	47 cfm
6120	1-1/2" Sq. Thru-Hole	Inside Trigger	2500-3500 ft.-lbs	14-3/4"	33.75 lbs	1/2" npt	70 cfm

Extra Heavy-Duty Impacts

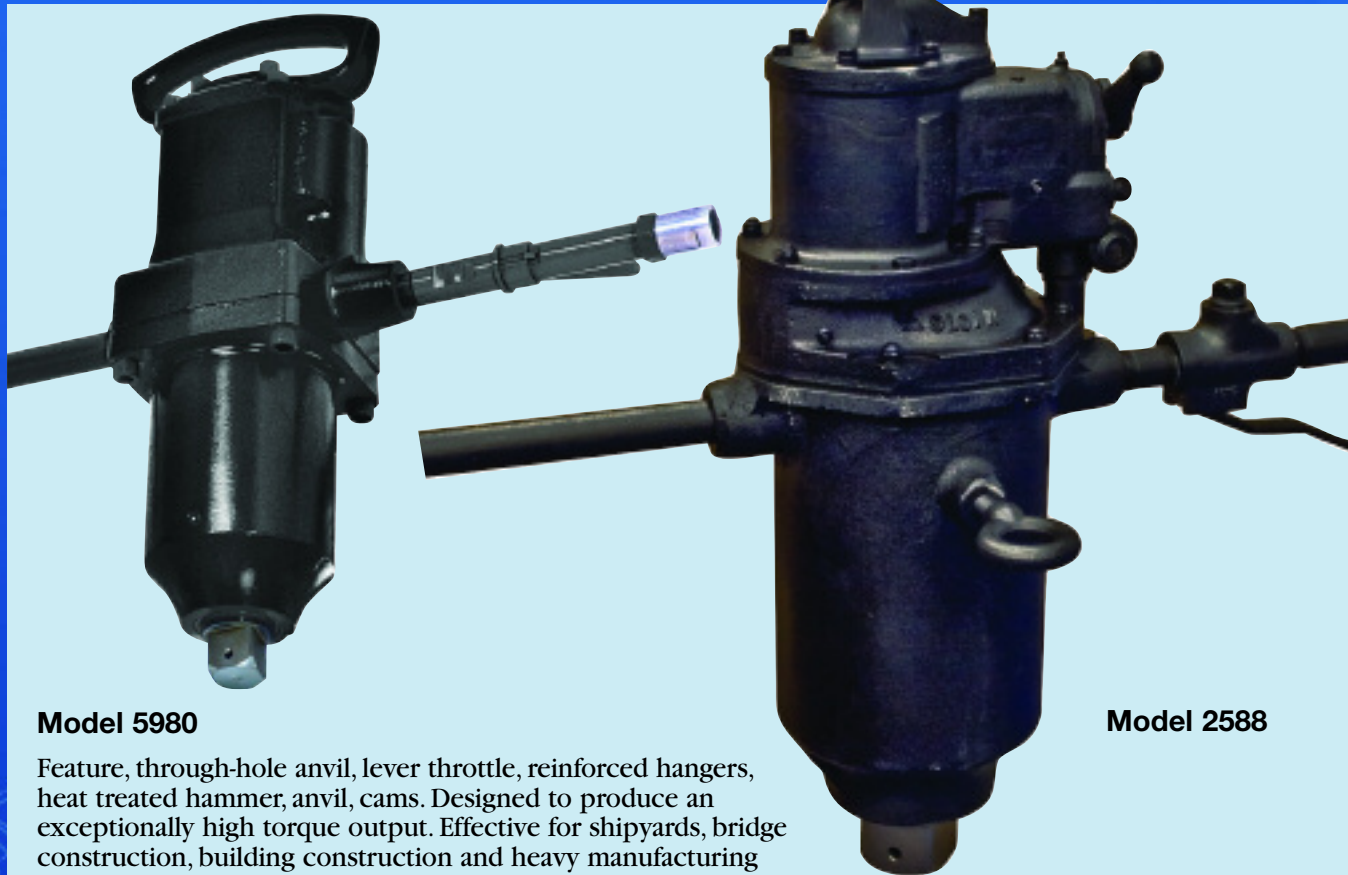

Model 5980

Model 2588

Feature, through-hole anvil, lever throttle, reinforced hangers, heat treated hammer, anvil, cams. Designed to produce an exceptionally high torque output. Effective for shipyards, bridge construction, building construction and heavy manufacturing plants. Time tested design for maximum durability.

Model No.	Shank Size	Torque Range	Length	Weight	Rec'd Hose Size	Air Inlet Thread	Avg. Air Consumption
5980	1-1/2" Sq. Through-Hole	5500-10000 ft.-lbs	23"	86 lbs	3/4"	3/4"	138 cfm
2588	2-1/2" Sq. Through-Hole	25000-50000 ft.-lbs	25-3/8"	215 lbs	1"	1"	155 cfm

INVENTORY

Commonly Rebuilt Impacts

Straight Impacts		Pistol Impacts	
1" - Sq. Dr. <i>one man</i>		3/4" - Sq. Dr.	
CP-0610	IR-2934B2	CP-9561	
CP-6100	IR-2940B2	CP-6060-SASAB	
CP-6110	WT-2109	IR-2920P1	
CP-0611		IR-2925P1	
1-1/2" - Sq. Dr. <i>one man</i>		IR-1720	
CP-6120	IR-2950B7	WP-2059	
CP-0614	WT-2119		
IR-2945B7	WT-2120		
Extra Heavy-Duty Impacts			
1-1/2" - Sq. Dr. <i>two man</i>		1" - Sq. Dr.	
IR-5980A1	IR-577	IR-2934P2	
IR-5780A1	CP-0616RS	IR-2940P2	
2-1/2" - Sq. Dr. <i>two man</i>		CP-9596-RS	
IR-588A1		CP-796	
IR-5982A1		CP-0610-RS	
3-1/2" - Sq. Dr. <i>two man</i>		WP-2060	
IR-599			

MPT is one of the largest Pneumatic Tool warehouses in the world, providing quality New, Rebuilt, and Re-Engineered Pneumatic Tools and Parts.




Virtually every air tool you need, RIGHT NOW!

World's Largest Impact Wrench

The IR-599A1, 3-1/2" is the WORLD'S LARGEST and most powerful square drive impact wrench, now even better and easier to use with the optional remote control system, which allows the operator to control the impact remotely from the work zone.

Ideal for long stud run-downs or removals.

- Requires max 375 CFM from compressor
- Weight 599 lbs.
- Max torque 80,000 ft. lbs.

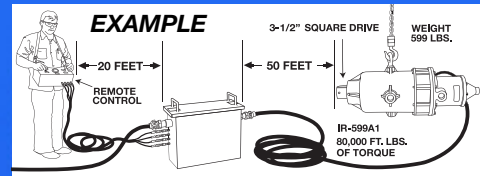

SERVICE

Service Department



Test Lab



Remanufacturing



Repair and Tune up kits for most Industrial Models

- IR-2920P
 - IR-2925P
 - IR-2934
 - IR-2940
 - IR-3940
 - IR-3942
 - IR-2945
 - IR-2950
 - CP-6060
 - CP-0611
 - CP-6120
- Call for other models not listed

REPLACEMENT PARTS



MORE THAN JUST AN
AIR TOOL COMPANY



Industrial Air Tools



Winches & Material Handling



Hydraulic Lifting and Pulling Equipment



Compressed Air Pipe Systems



Exhausted Air Recycling Systems



MICHIGAN PNEUMATIC TOOL

Industrial Air Tools

10650 Cloverdale • P.O. Box 04950
Detroit Michigan 48204-0950

Copyright © 2011 Michigan Pneumatic® Tool, Inc.