# MOEN®

#### DESCRIPTION

- Various finishes identified by suffix
- Magnetix<sup>™</sup> technology features an innovative magnetic docking system
- Includes rainshower, handshower, hose and magnetic docking system
- 60" double interlock spiral hose (metal), for Chrome and Spot Resist Brushed Nickel finishes
- 1/2" IPS connection

## OPERATION

- Rainshower is single function, Handshower is six functions
- Rotate outer ring to select function
  3-way diverter provides ability to flow each shower head separately or
- combined for more coverage
  Pause/trickle button allows to momentarily pause the handshower flow at a push of a button

#### FLOW

- Designed to deliver 1.75 gpm (6.6 L/min) MAX at 80 psi
   (for models manufactured after 3/1/2018)
- Designed to deliver 2.0 gpm (7.6 L/min) MAX at 80 psi (for models manufactured before 3/1/2018)

#### STANDARDS

- Designed and manufactured to comply with the applicable requirements of ASME A112.18.1/CSA B-125.1, and all applicable specifications referenced therein
- Products marked with 1.75 gpm are compliant with California water efficiency regulations
- ADA 🔬 compliant

# WARRANTY

- Lifetime limited warranty against material or manufacturing defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit www.moen.com/support for complete details and limitations




# Attract™

#### 6-Function Rainshower/ Handshower Combo with Magnetix™ Docking Hose

## Model: 26008 series



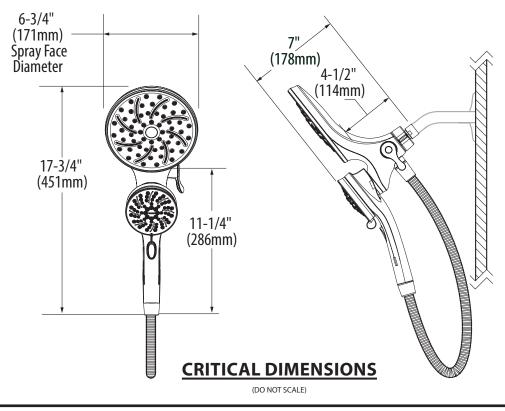

# Specifications